

# OptiSpot Lens Ø 69 mm - Flood

35.269 - OptiSpot Lens for use with COB connectors 47.360 Ø 44 mm

Part no.


35.269.B013-0 White

35.269.B013-1 Black

**Bayonet fixing by Twist & Lock action**

**Light distribution: Flood**

OptiSpot Lens for use with connectors  
47.360.5010-0, 47.360.5015-0, 47.360.5084-0, 47.360.5090-0  
with Ø 44 mm.

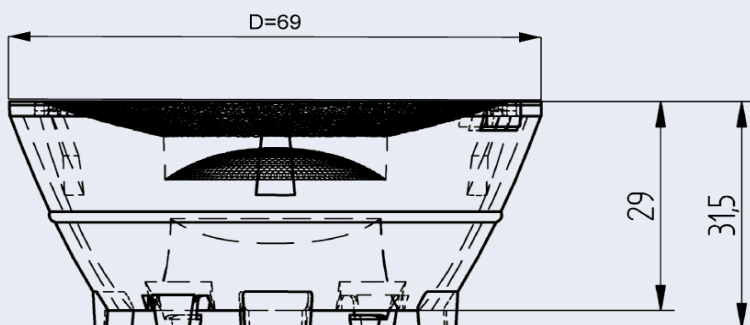


Specification	
Ø on top	69 mm
Height	31,5 mm
Material holder	PC
Material lens	PMMA
Operating temperature	- 40 ... 80°C*
Weights	65.5 g
Pkg.	150 pcs

This product contains the following REACH SVHC substances.  
For further information please refer to [www.bjb.com](http://www.bjb.com).

CAS-Number	EG-Number	Substance name
3147-75-9	221-573-5	2-(2H-benzotriazol-2-yl)-4-(1,1,3,3-tetramethylbutyl)phenol

\* 70°C, if ball pressure test according to EN 60598-1 section 13.2.1 is required for components that ensure protection against electric

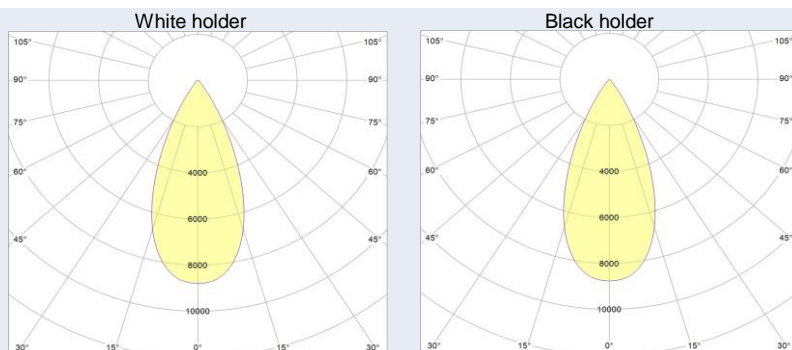

Photometric data		
	White holder	Black holder
Beam angle (FWHM)*	45°	45°
Efficiency*	97%	92%
Measured with COB Type	Citizen CLU03Q-1210E1-403L7X4	
Measured with COB-holder	47.360.5010-0	

\*Light distribution, beam angle and efficiency are dependent on the COB in use and its LES.